


COPY RIGHT & CONFIDENTIAL THIS DOCUMENT IS THE EXCLUSIVE PROPERTY OF BEML & CONTAINS CONFIDENTIAL INFORMATION. THIS DOCUMENT OR ITS CONTENTS SHALL NOT BE USED, REPRODUCED OR DISCLOSED IN WHOLE OR IN PART, WITHOUT PRIOR WRITTEN PERMISSION OF BEML. THIS DOCUMENT & ALL ITS COPIES SHALL BE RETURNED TO BEML ON DEMAND. DRAWING RELEASED FROM PWB, PHYSICAL SIGNATURE NOT REQUIRED

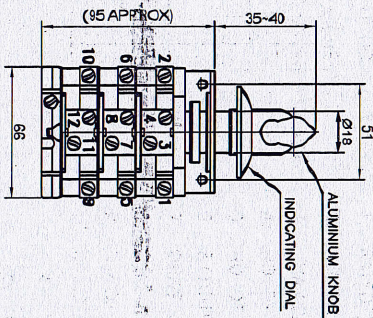


POSITION	1	2	3	4	5	6	7	8	9	10	11	12
DEGREE	0	45	90	135	180	225	270	315	360	0	45	90
DIAL MARKING												

SWITCHING TABLE


LINKS

TECHNICAL REQUIREMENTS:

- RATED VOLTAGE & CURRENT : 110V, DC, 10A AT DC 11 RATING.
- SWITCH TYPE : 25AMPS RATING (SIZE).
- HANDLE : ALUMINIUM KNOB PAINTED BLACK
- NO OF SWITCHING PACKETS : 3
- NO OF CONTACTS : 6
- EXECUTION : OPEN.
- DRIVE : NORMAL.
- SELECTION ANGLE : 45° BETWEEN EACH POSITION
- NO OF SWITCHING POSITION : 2
- DIRECTION OF ROTATION :
 - 0° CLOCKWISE (HIGH RANGE).
 - 45° ANTI-CLOCKWISE (LOW RANGE).
- MAKE : M/s SIEMENS, / M/s ELECTRO INTERFACE.
: M/s SALZER ELECTRONIC LTD.
- TERMINAL MARKING TO BE DONE AS SHOWN IN THE SKETCH.
- MARKING 'I' SHALL BE ENGRAVED AND PAINTED WHITE ON THE KNOB AS SHOWN IN DIAGRAM.
- INDICATING DIAL SHOULD BE OF ALUMINIUM AND PAINTED WITH BLACK COLOUR.
- THE LOCKING BETWEEN SWITCH, INDICATING DIAL & KNOB SHOULD BE OF HEAVY DUTY & SHOULD NOT LOOSEN IN FREQUENT OPERATION.



MARKING ON
INDICATING DIAL

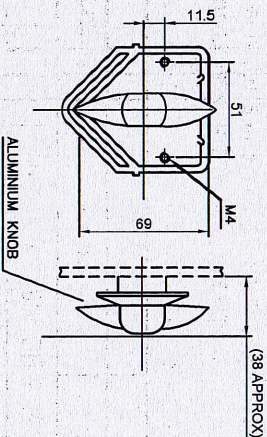

GRADE No.	N12	N11	N10	N9	N8	N7	N6	N5	N4	N3	N2	N1
VALUE	50	25	12.5	6.3	3.2	1.6	0.8	0.4	0.2	0.1	0.05	0.025
SYMBOL												

NOTE:
ALL OTHER DETAILS AS PER MANUFACTURERS STANDARD.

SL.No.	QTY	PART / STOCK No.	DESCRIPTION	SIZE	COMPANY STD./S	MA. (kg)
			8W DH I&M CAR - MRVC			
			PRODUCT			
			REF. DRG			
			MATERIAL			
			HEAT TREAT.			
			SURFACE TREAT.			
			TITLE			
			RANGE SELECTOR SWITCH			
			APPROD	KC Shashikanth		
			REV'D	Jayaramu S		
			CHK'D	JK Yadav		
			DRAWN	JK Yadav		
			SCALE			
			SHEET			
			OF			
			ALT			

BEML LIMITED

899-21115